


## Features

- Finish is engineered to resist corrosion and daily wear
- Ergonomic handshower pivots for targeted hydromassage or rinsing the shower enclosure
- Multifunction handshower with wide coverage, massage, soft aerated, and reduced flow options
- MasterClean™ spray nozzles to prohibit mineral build-up for easy cleaning
- Covered by KOHLER lifetime limited warranty
- Handshower offers 2.5 gal/min (9.5 l/min) maximum flow rate
- Complements Stillness® and Purist® faucets and accessories
- Includes handshower, slidebar, supply elbow, and 60" (1524 mm) metal shower hose
- ADA non-positive shut-off
- 30" (762 mm) slidebar length offers a custom shower at various heights

## CONTEMPORARY HANDSHOWER KIT K-9059

ADA

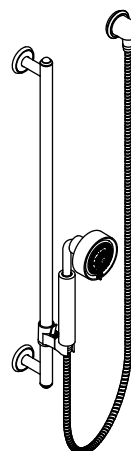

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.18.1/CSA B125.1

## Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel

## Specified Model

Model	Description	Colors/Finishes	
K-9059	Contemporary handshower kit	<input type="checkbox"/> CP	<input type="checkbox"/> BN

## Product Specification

The handshower kit shall be 30" (762 mm) in length offering a custom shower at various heights. Kit shall include handshower, slidebar, supply elbow, and 60" (1524 mm) metal shower hose. Kit shall feature a finish engineered to resist corrosion and daily wear. Kit shall feature ergonomic handshower which pivots for targeted hydromassage or rinsing the shower enclosure. Kit shall feature multifunction handshower with wide coverage, massage, soft aerated, and reduced flow options. Handshower offers 2.5 gal/min (9.5 l/min) maximum flow rate. Handshower shall provide ADA non-positive shut-off. Kit shall feature MasterClean spray nozzles to prohibit mineral build-up for easy cleaning. Kit shall complement Stillness and Purist faucets and accessories, and shall be covered by the KOHLER lifetime limited warranty. Handshower kit shall be Kohler Model K-9059-\_\_\_\_\_.


## Installation Notes

Install this product according to the installation guide.

**IMPORTANT!** The sidebar must be mounted to stud framing at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the sidebar.

Plumbing codes may require an atmospheric vacuum breaker (such as the KOHLER K-9660) be installed in-line to handshowers. Consult with local plumbing codes.

Reduced flow spray option provides non-positive shut-off required by 2010 ADA Standards for Accessible Design, Section 607.6 Spray Unit and Water (baths) and Section 608.6 Spray Unit and Water (Showers).

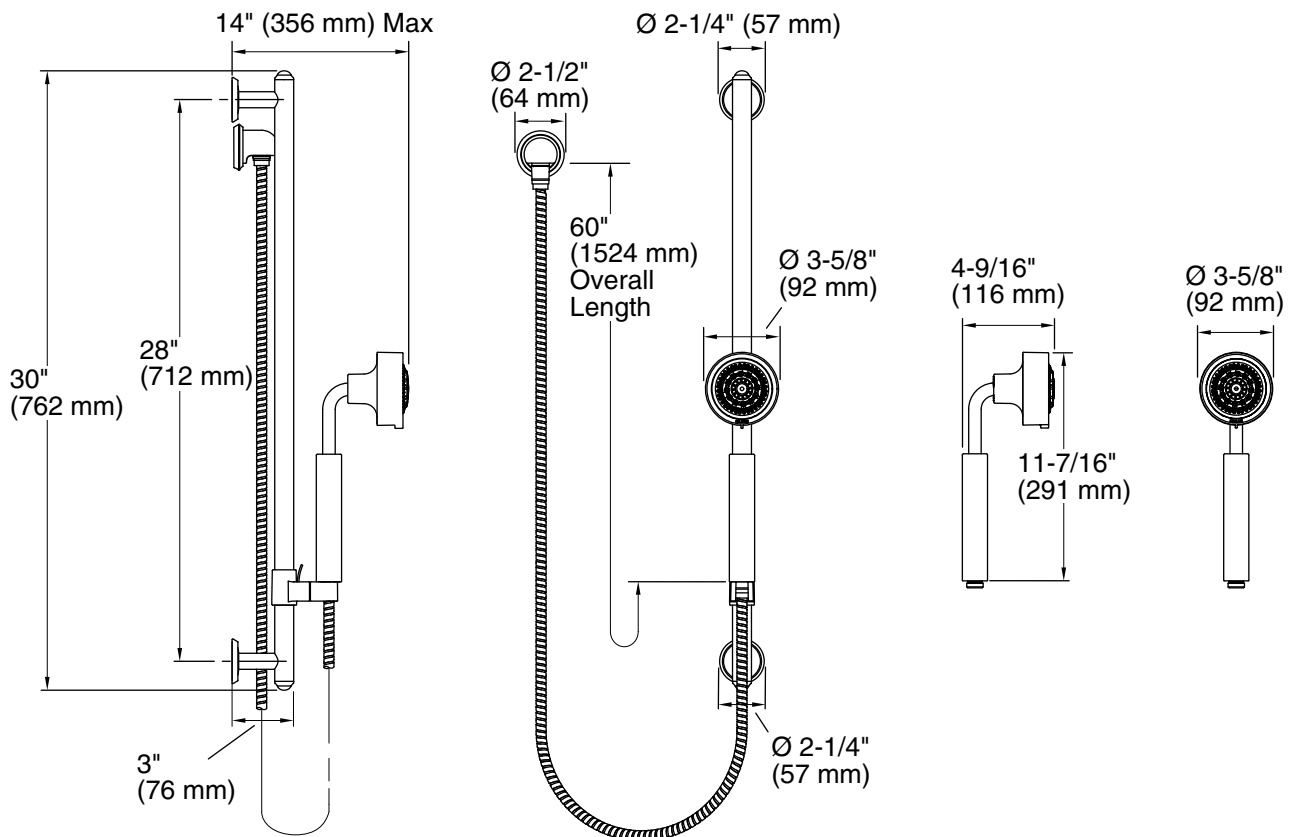

Product Diagram