

Features

- Katalyst™ Spray Technology with air induction ball joint.
- Single-function showerhead with 48 nozzle 5-15/16" (15.1 cm) diameter sprayface.
- Optimized sprayface for maximum performance.
- MasterClean™ spray nozzles to prohibit mineral build-up for easy cleaning.
- Complements Bancroft® Suite.
- 2.0 gallons (7.6 L) per minute flow rate.

Installation

- 1/2" - 14 NPT connection.

Recommended Products/Accessories

K-7397 Shower Arm and Flange




Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

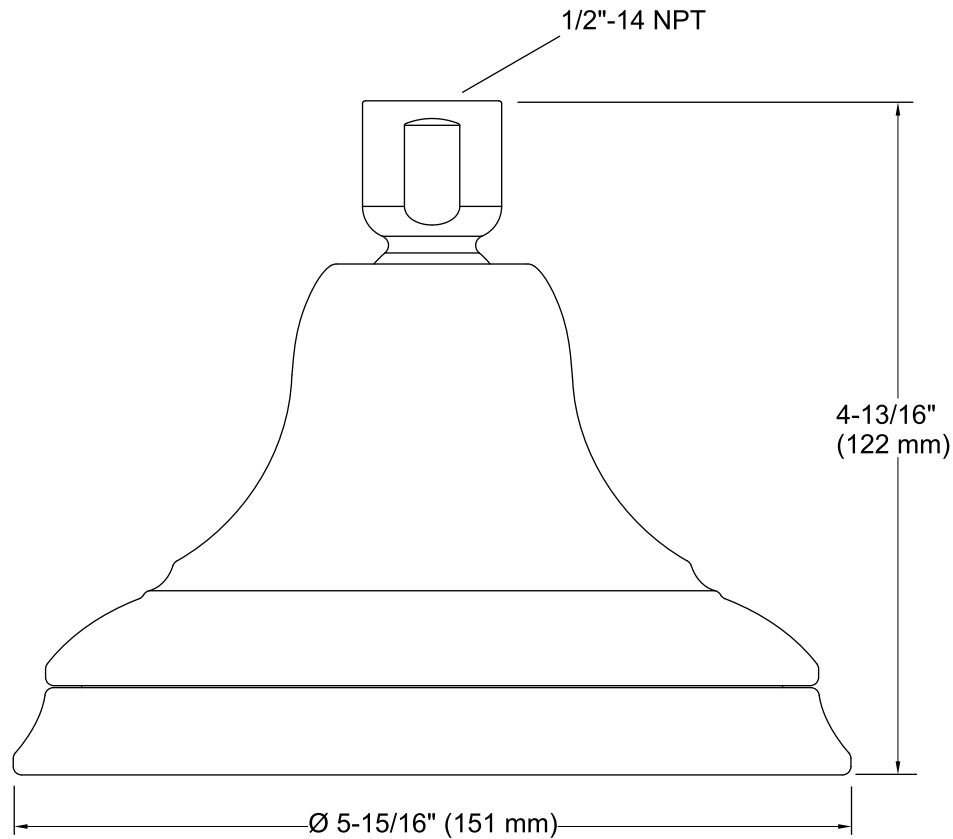

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2 gal/min (7.6 l/min)

Notes

Install this product according to the installation guide.